



## C4S-4X1-QUAD4K

### 4K@60Hz 4x1 Seamless Multiviewer Video Switch w/Audio

#### Flexible Video Layouts

Provides Multi-Viewing content on a single display with up to 4 live sources on a single output, in PiP, PbP 50/50, PbP 70/30, or single source view.

#### Real 4K Quality

With no compromise on image quality, the C4S-4X1-QUAD4K delivers a crisp 4K experience at 4:4:4, which ensures all details will be presented.

#### Easy & Simple

No setup needed, simply plug-in to power and start working.

#### Reliable

Pure-hardware no embedded OS, fan-less design

#### Audio Mixer Inside

HDMI Audio can be de-embedded and switched to an analog L+R RCA or optic for use on external audio systems, Supports LPCM, AC3, DD+, DTS, DTS-HD, up to 7.1 audio channels.

### Features

- Small Form Factor Multiviewer Switch
- Real 4K-DCI, 60Hz 4:4:4 Support for All Inputs and Outputs
- Under the Desk / On the Wall Installation Brackets
- Seamless Switching Time Between Sources
- Audio De-embedding to Analog & Fiber
- Volume Control by IR/RS232 Control
- Optional 3rd Party External Control by RS232 Commands

### Applications

Meeting Rooms, Control Rooms, Government, Corporate, Digital Signage, Retail, Higher Education, Healthcare & Industrial.

## C4S-4X1-QUAD4K | Technical Specification


Part No.	C4S-4X1-QUAD4K
Inputs	4 x HDMI
Output	1x HDMI
Input/Output Type	HDMI 2.0b
Input Resolution	4096 x 2160@60Hz 4:4:4
Output Resolution	4096 x 2160@60Hz 4:4:4
Digital Audio	All ports support HDMI Digital Audio
Analog Audio	Supports Audio Extract with Volume Adjust (2xRCA + Fiber)
DHDCP Support	HDCP 2.2 & 1.x
Edd	Edd Management
Single Source Switching	Seamless Switching
Multiview Source Switching	Fast Switching
Viewing Options	Single Source, PiP (1+1, 1+2, 1+3), Side By Side (SbS), Quad
Source Viewing Options	Setup on demand
Source Switching Methods	Front Buttons, IR & RS232 Commands
<b>Environmental</b>	
Input Voltage (vice)	12vDC / 2.5A
Input Voltage (vice)	100-240v AC 50/60Hz (US/EU Type)
Max Power Consumption (w)	10W (Max)
Operating Temperature	0° to +40 °c / 32°f to 104 °F
Storage Temperature	-20 to +60 °c / 4°f to 140 °F
Operating Humidity	10% to 90% Non-Condensing
Storage Humidity	10% to 90% Non-Condensing
<b>Physical Specification</b>	
Net Dimension (L*H*D)	220 x 30x 100 mm / 8.66 x 1.18 x 3.94 Inch
Shipping Dimension (W*D*H)	285 x 80 x 182 mm / 11.22 x 3.15 x 7.16 Inch
Net Weight	620 gr / 1.37 lbs.
Installation Option	Wall Mount Brackets or Self Stand
3rd Party Control	By RS232 Commands
<b>Accessories</b>	
Package Contains	1x Multiview Unit
	1x IR Remote control
	1x IR External Rx Cable 1.5m / 4.9 ft long
	1x Terminal for RS232 Connection
	1 set for Wall/Desk Mounting w/4 Screws

## C4S-4X1-QUAD4K | Images

### C4S-4X1-QUAD4K – Front & Back



### C4S-4X1-QUAD4K – Viewing Options

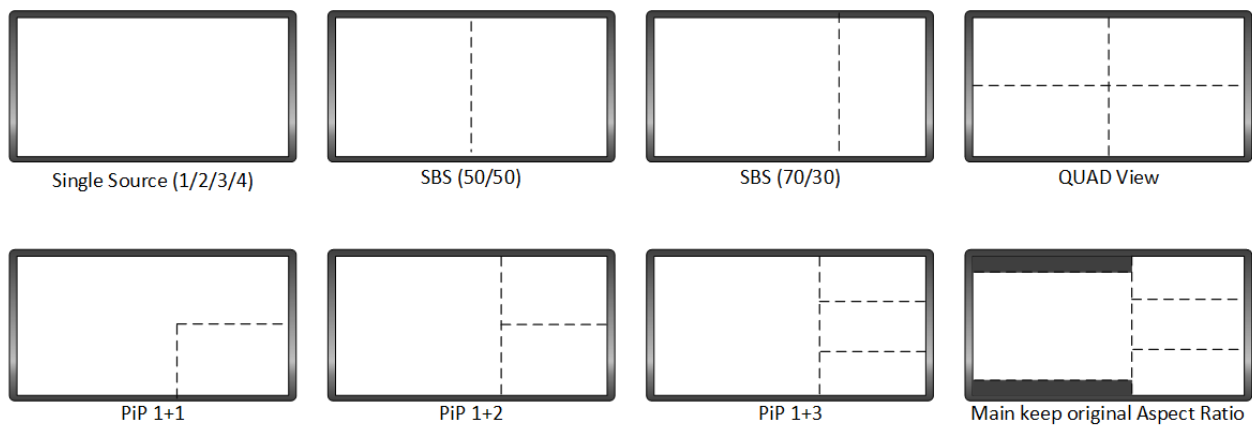

The information contained in this document is subject to change without notice. All product, product specifications and data are subject to change without notice.